



# Seismic qualified

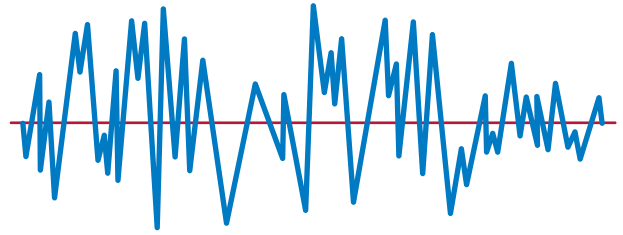

Eaton Corporation's equipment identified below was tested for seismic withstand capability and tested in accordance with the combined requirements specified in the International Building Code, the California Building Code, and the Uniform Building Code.

As required by the codes, the equipment demonstrated its ability to function after the seismic tests. The seismic capability of the equipment exceeds the worst-case required levels, as illustrated in the figure below.

## Safety Switches (30 A to 1200 A)—Heavy-Duty Single-Throw, Double-Throw, and Quick Connect; General-Duty Single-Throw and Double-Throw

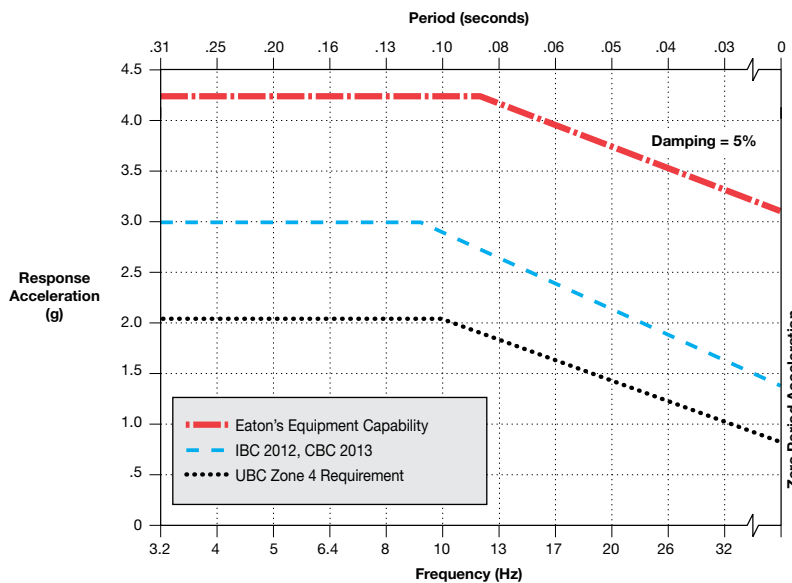

The frequency sweep tests revealed that the lowest equipment natural frequency is:

**N/A  
(Wall-Mounted)**

Drawing Number  
SA008001EN

William V. Joerger, S.E.  
ISAT

3RD PARTY TEST ENGINEER IN CHARGE

**TESTED BY**  
Wyle Laboratories  
December, 2012-70282R12

For interpretation of testing data,  
refer to Eaton  
Publication SA12501SE